



Appl. No. : 10/817,123
Confirmation No. : 1509
Applicant : Christopher James Lodge

Filed : April 2, 2004
Title : CHAIN WEAR MONITORING
METHOD AND APPARATUS

TC/A.U. : 3651
Examiner : James R. Bidwell

Docket No. : 063511-9066-00

Customer No. 23409

Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

I, Mary A. Hietpas, hereby certify that this correspondence is being deposited with the U.S. Postal Service as first class mail in an envelope addressed to Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450, on the date of my signature.


Signature


Date of Signature

SUBMISSION OF PRIORITY DOCUMENT

Sir:

Enclosed for filing is a certified copy of the priority document for the above-identified application.

Applicant claimed foreign priority on the Declaration as filed on July 8, 2004.

Respectfully submitted,



David B. Smith
Reg. No. 27,595

Docket No.: 063511-9066-00
Michael Best & Friedrich LLP
100 East Wisconsin Avenue
Milwaukee, Wisconsin 53202-4108

(414) 271-6560

X:\clientb\063511\9066\A1020193.1

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


Stephen Hordley

Dated 26 October 2004

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

THIS PAGE BLANK (USPTO)

The Patent Office

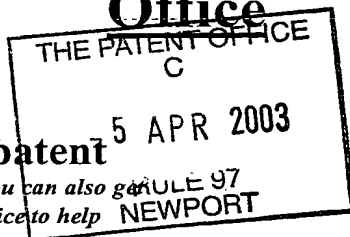

07APR03 E798837-3 D00354
P01 7700 0/00-0307981.1

Request for grant of a patent

(see the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1.	Your reference	DE/J089337PGB		
2.	Patent application number (The Patent Office will fill in this part)	0307981.1	5 APR 2003	
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	RENOLD PLC RENOLD HOUSE STYAL ROAD WYTHENSHAW MANCHESTER, M22 5WL		
	Patents ADP number (if you know it)			
	If the applicant is a corporate body, give the country/state of its incorporation	UNITED KINGDOM 684738001		
4.	Title of the invention	CHAIN WEAR MONITORING METHOD AND APPARATUS		
5.	Name of your agent (if you have one)	Marks & Clerk		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Sussex House 83-85 Mosley Street Manchester M2 3LG		
	Patents ADP number (if you know it)	18004 ✓		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8.	Is a statement of Inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form -

Description 6

Claim(s) 3

Abstract 1

Drawing(s) 2

+2 *hm*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of Inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

ONE

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(Please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature *Mannell* Date 04/04/03

MANN & CLERK

12. Name and daytime telephone number of person to contact in the United Kingdom MR D A EVERY
0161 233 5804

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.


The Patent Office

7/77

25MAR04 8159644-2 D03312
P07/7700 0.00-0307981.1 NONE
The Patent Office

Statement of inventorship and of right to grant of a patent

Cardiff Road
Newport
Gwent NP9 1RH



1.	Your reference	
2.	Patent application number (if you know it)	0307981.1
3.	Full name of the or of each applicant	RENOLD PLC
4.	Title of the invention	CHAIN WEAR MONITORING METHOD AND APPARATUS
5.	State how the applicant(s) derived the right from the inventor(s) to be granted a patent	By virtue of the employment of the Inventors by the applicant company.
6.	How many, if any, additional Patents Forms 7/77 are attached to this form? (See note (c))	NONE
7.	I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to. Signature..... <i>M. M. M.</i> Date 24/03/04 MARKS & CLERK	
8.	Name and daytime telephone number of person to contact in the United Kingdom	Mr D.A. Every 0161 233 5804

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

CHRISTOPHER JAMES LODGE
12 Highbank
Tintwistle
Glossop
Derbyshire
SK13 1LP
UNITED KINGDOM

8837692001

Patents ADP number (if you know it):

Patents ADP number (if you know it):

Reminder

Have you signed the form?

Patents ADP number (if you know it):

CHAIN WEAR MONITORING METHOD AND APPARATUS

The present invention relates to a chain wear monitoring method and apparatus.

Chain drive assemblies are used in many applications such as, for example, in conveyor systems of manufacturing production lines, in transportation systems such as escalators, elevators or leisure rides (roller coasters etc.), and in internal combustion engines for vehicles. In many applications multiple strands of chain will be used in a single drive assembly.

A chain drive assembly typically comprises at least one endless loop chain that passes around spaced wheels one of which is driven in rotation so as to circulate the chain and any components connected thereto. A chain typically comprises a plurality of chain link assemblies that are interconnected by pins passing through overlapping apertures in adjacent link assemblies.

Over a period of use, a chain will be subjected to wear by virtue of the rubbing friction between adjacent link assemblies and between the pins and the link assemblies. This wear results in elongation of the chain and eventually the chain will have to be replaced to avoid failure of the drive assembly. The rate of wear of a chain is dependent on the nature of the drive assembly in which it is fitted, the loads to which it is subjected and the environment in which it operates. Failure cannot therefore be predicted with any certainty and regular visual inspection and/or manual measurement is required. This is obviously undesirable. Not only is it labour intensive and imprecise but it also requires operation of the chain drive assembly to be temporarily interrupted, something which is inefficient in a production environment.

US 5,490,590 describes a chain wear monitor in which the length of a section of a chain is measured during regular operation of the chain drive system. The monitor comprises a wheel that is brought into frictional engagement with the chain. The wheel is mounted on a shaft that is connected to an encoder by a flexible coupling. The encoder translates rotational movement of the shaft into an electrical signal that is passed to a controller for processing. At the same time, the presence of each chain link is detected by a proximity sensor as it passes a predetermined location. The sensor generates a count signal that is passed to a controller for processing. The controller

calculates from the distance and count signals a distance measurement per pre-selected number of chain links. This arrangement has to be incorporated into the chain drive system and is prone to inaccuracies caused by relative slip between the friction wheel and the chain.

Our co-pending UK patent application no. 0117993.6 describes a chain wear monitoring system in which two proximity sensors disposed at a fixed distance apart are used to detect the passing of markers attached to a chain that is in operation. A timer measures the elapsed time for a given marker to pass between the two sensors so as to determine the speed of travel of the chain. The timer also measures the time that elapses between a first of the markers passing a given sensor and a second of the markers passing a given sensor. The distance between the markers can be calculated from the measured elapsed time and the calculated speed of the chain. The chain elongation is then calculated from the difference between this distance and the original distance between the markers. This monitoring system works well but is only suited for applications in which the chain drive operates at a constant speed.

It is an object of the present invention to obviate or mitigate the aforesaid disadvantage and to provide for an improved method and apparatus for automatically monitoring the wear of a chain in-situ.

According to a first aspect of the present invention there is provided a method for automatically monitoring the wear of a chain when in operation in a chain drive assembly, comprising the steps of applying first and second markers to the chain at a predetermined distance apart along the length of the chain, positioning a first sensor adjacent to the chain to coincide with the position of the first marker, positioning a second sensor adjacent to the chain to coincide with the position of the second marker, the sensors being capable of generating signals in response to the detection of the proximity of the markers, operating the chain drive assembly so that the first and second sensors are initially triggered substantially simultaneously by said first and second markers respectively, detecting elongation of the chain by determining when a predetermined time delay occurs between the triggering of the first and second sensors by the respective markers, moving at least one of the sensors to resume substantially

simultaneous triggering of the sensors by the markers and measuring the distance the sensor is moved to determine the elongation length of the chain.

According to a second aspect of the present invention there is provided chain wear monitoring apparatus for automatically monitoring the wear of a chain when in operation in a chain drive assembly, the apparatus comprising: first and second sensors mounted on a support, first and second markers disposed at a predetermined distance apart along the length of the chain, the first sensor being disposed adjacent to the first marker and the second sensor being disposed adjacent to the second marker, the sensors each being capable of generating a signal in response to the detection of the proximity of a marker, means for detecting a time delay between the first sensor being triggered by said first marker and the second sensor being triggered by said second marker, at least one of the sensors being movable to a position where substantially simultaneous triggering of the sensors by the markers is resumed, means for measuring the distance the sensor is moved so as to determine the elongation length of the chain.

Specific embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which:

figure 1 is a schematic representation of the chain wear monitoring apparatus applied to part of a chain of a chain drive assembly;

figure 2 is a schematic representation of an alternative embodiment of the present invention being used with a lifting chain; and

figure 3 is a schematic representation of a further alternative embodiment of the present invention being used with a lifting chain

Referring first to figure 1, the exemplary chain wear monitoring apparatus comprises a pair of inductive or Hall-effect sensors S_1 , S_2 disposed near to the chain 10 at a fixed distance d apart in the direction of travel of the chain (right to left in figure 1). The middle portion of the chain is omitted so that the figure can be fitted on to the page. The sensors are disposed on opposite sides of the chain with one, S_1 , fixed to a stationary support structure 11 such as, for example, a framework that carries the chain drive assembly and the other, S_2 , supported such that it is moveable in the longitudinal direction of the chain. The sensors S_1 , S_2 are connected to a control unit

12 that receives and processes the signals from the sensors S_1 , S_2 and generates output signals that drive a visual display 13 and an audio unit 14.

The control unit 12 comprises conventional signal conditioning circuitry, a timer, a processor with associated memory, and an output circuit for driving the visual display 13 and/or an audio unit 14.

The chain 10 is fitted with two markers M_1 , M_2 that are composed of a material to which the sensors are sensitive (e.g. magnetic elements) and are disposed initially at the predetermined distance d apart. The markers M_1 , M_2 may simply clip or otherwise fasten directly or indirectly on to the chain. When the chain is in use an electrical signal is generated by each sensor as each marker M_1 , M_2 passes in front of it and the signal is passed to the control unit 12. The sensors are initially positioned to coincide with the position of the markers M_1 , M_2 (as shown in figure 1) such that both the sensors S_1 , S_2 are triggered simultaneously during chain movement. The triggering of the sensors may be viewed on the visual display and/or may be heard via the audio unit output. When the chain portion between the sensors wears and is extended in length there will be a time delay between the triggering of the sensors S_1 , S_2 by the respective markers M_1 , M_2 . At a chosen time the misalignment of the sensors to the markers is corrected by adjusting the position of the moveable sensor S_2 either manually or automatically so that the sensors are excited simultaneously again. The distance the sensor S_2 has to be moved from the initial position can be measured either manually or automatically (by, for example, a motor) to determine the elongation of the chain.

In the case of a fully automated system the processor in the control unit 12 continually compares the determined elongation value with a threshold value and may generate an audio and/or visual signal to alert an operator when the threshold is exceeded.

The apparatus can be used to monitor the wear of two chains that are running in parallel to drive a conveyor such as, for example, an escalator. In such an application each chain has at least two markers and a pair of sensors mounted in proximity thereto. The control unit receives signals from both sensors and is pre-programmed with the parameters relating to each chain. The chain wear is monitored

in both chains by the control unit. The difference between the two calculated elongation values is determined and compared to a predetermined threshold value. If this value is exceeded the control unit issues a signal to the alarm signal generator and an appropriate alarm is sounded. This is particularly important in conveyors such as escalators where inequality of wear in the two chains may result in damage to the chain drive assembly or the escalator itself.

The embodiments of figures 2 and 3 illustrate the use of the apparatus for monitoring wear in a lifting chain such as that used in a fork lift truck mast assembly. The chain 20 is arranged over a sheave or pulley at the top of the mast assembly. The two depending stretches of chain are connected respectively to a fixed anchor and the lifting carriage (neither of which is shown in the figures). Again portions of each chain are omitted in the figures. In figure 2 the monitoring apparatus has one fixed S_1 and one movable sensor S_2 as in the embodiment of figure 1, whereas in the embodiment of figure 3 the sensors S_1 , S_2 are connected to a common support 23 so that they can be moved together. In each embodiment the sensors are initially positioned to coincide with the position of the markers M_1 , M_2 as shown in the figures. As chain extends in use the movable sensor S_2 or the sensors S_1 , S_2 on the common moveable support 23 is adjusted as before to ensure that the sensors S_1 , S_2 are excited simultaneously. The distance moved is measured to determine the elongation value as described before.

The apparatus allows chain extension to be monitored continuously without stopping the drive and regardless of the speed or torque of the drive assembly. Any interaction with or adjustment to the apparatus during use of the chain drive is limited to those parts that are not connected to the chain 10 or 20 and so does not result in interruption of the operation of the chain drive.

It will be appreciated that numerous modifications to the above described design may be made without departing from the scope of the invention as defined in the appended claims. For example, the chain may be fitted with more than two markers and the chain elongation measured for different sections of the chain. An average chain wear may be calculated by the control unit from the measured values. Moreover, if a comparison is made of the determined elongation values this method

enables identification of a section of chain that is wearing at a greater rate than other sections. Furthermore, the sensors may be of any suitable type for detecting the presence of a marker e.g. optical or laser based.

CLAIMS

1. A method for automatically monitoring the wear of a chain when in operation in a chain drive assembly, comprising the steps of applying first and second markers to the chain at a predetermined distance apart along the length of the chain, positioning a first sensor adjacent to the chain to coincide with the position of the first marker, positioning a second sensor adjacent to the chain to coincide with the position of the second marker, the sensors being capable of generating signals in response to the detection of the proximity of the markers, operating the chain drive assembly so that the first and second sensors are initially triggered substantially simultaneously by said first and second markers respectively, detecting elongation of the chain by determining when a predetermined time delay occurs between the triggering of the first and second sensors by the respective markers, moving at least one of the sensors to a position where substantially simultaneous triggering of the sensors by the markers is resumed, and measuring the distance the sensor is moved to determine the elongation length of the chain.
2. A method according to claim 1, wherein only one of the sensors is moved.
3. A method according to claim 1, wherein both of the sensors are moved.
4. A method according to claim 3, wherein the sensors are moved together.
5. A method according to any one of claims 1 to 4, wherein two or more parallel chains are used in the drive assembly, further comprising the steps of determining the elongation of each of the chains and comparing the elongation of each chain over time.
6. A method according to any one of claims 1 to 5, further comprising the step of comparing the determined elongation length with a predetermined threshold value and issuing an alarm signal if the calculated value exceeds the threshold value.

7. A method according to claim 5, wherein two or more sets of first and second sensors are used to monitor wear in two or more chains, each of the chains having at least two markers.
8. A method according any one of claims 1 to 7, further comprising the step of monitoring the chain wear at different sections along a chain by using more than two markers, and determining the chain elongation at each of the different sections along the chain.
9. A method according to claim 8, further comprising the step of comparing the determined values of chain elongation at each of the different sections along the chain and issuing an alarm signal if one section of the chain is wearing more rapidly than another.
10. A method for automatically monitoring the wear of a chain substantially as hereinbefore described with reference to the accompanying drawings.
11. Chain wear monitoring apparatus for automatically monitoring the wear of a chain when in operation in a chain drive assembly, the apparatus comprising: first and second sensors mounted on a support, first and second markers disposed at a predetermined distance apart along the length of the chain, the first sensor being disposed adjacent to the first marker and the second sensor being disposed adjacent to the second marker, the sensors each being capable of generating a signal in response to the detection of the proximity of a marker, means for detecting a time delay between the first sensor being triggered by said first marker and the second sensor being triggered by said second marker, at least one of the sensors being movable to position where substantially simultaneous triggering of the sensors by the markers is resumed, and means for measuring the distance the sensor is moved so as to determine the elongation length of the chain.

12. Apparatus according to claim 11, wherein one sensor is fixed and the other is movable.
13. Apparatus according to claim 11, wherein both sensors are movable.
14. Apparatus according to claim 13, wherein both sensors are fixed to a common movable support so that they can be moved together.
15. Chain wear monitoring apparatus substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACTCHAIN WEAR MONITORING METHOD AND APPARATUS

A method and apparatus for automatically monitoring the wear of a chain when in operation in a chain drive assembly. First and second markers are applied to the chain at a predetermined distance apart. A first sensor is disposed adjacent to the chain to coincide with the position of the first marker. A second sensor is disposed adjacent to the chain to coincide with the position of the second marker. The sensors generate signals in response to the detection of the markers. When the chain drive is operated the first and second sensors are initially triggered substantially simultaneously by said first and second markers respectively. After the chain extends through wear elongation is identified by detecting a time delay between the triggering of the first and second sensors by the respective markers. One of the sensors is then moved to a position where substantially simultaneous triggering of the sensors by the markers can be resumed. The distance the sensor has to be moved is measured to determine the elongation length of the chain.

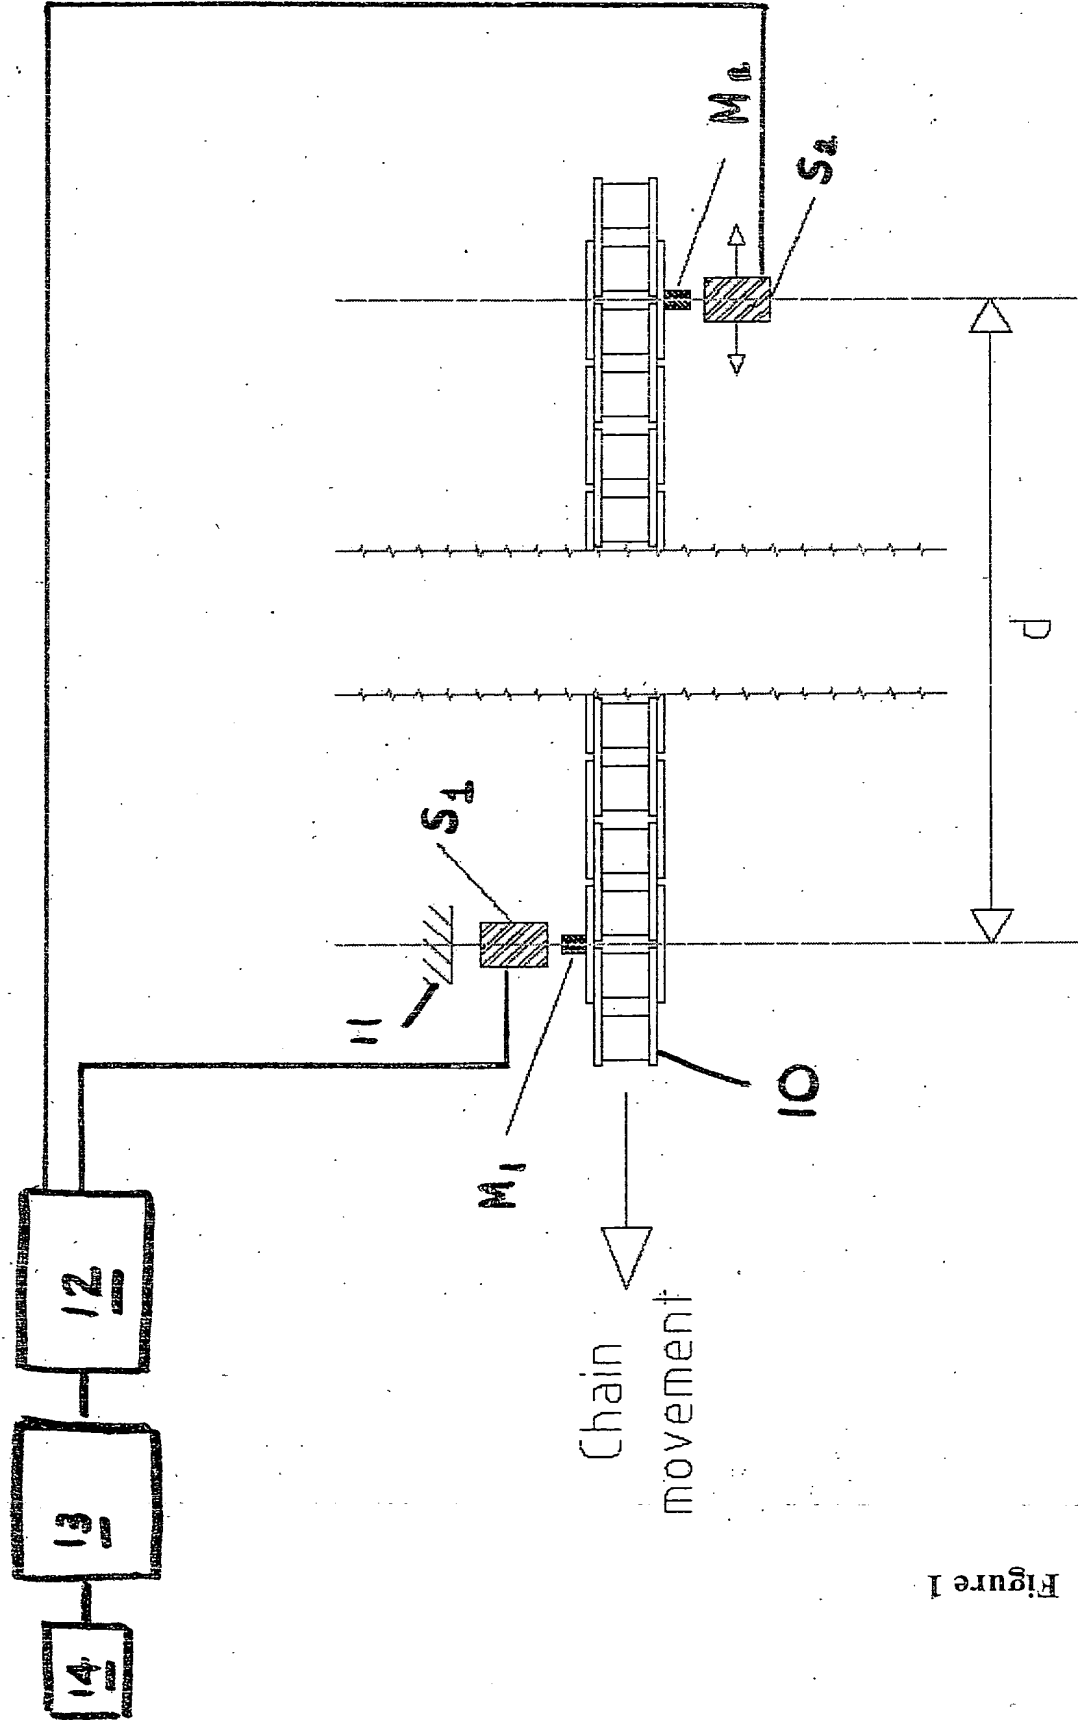


Figure 1

THIS PAGE BLANK (USPTO)

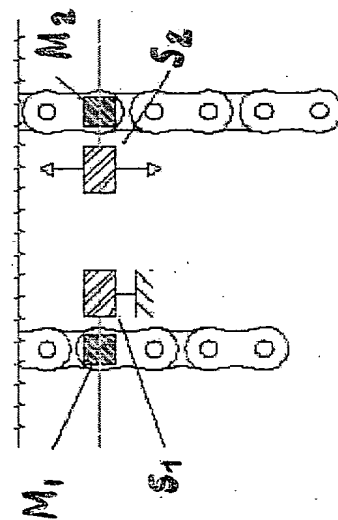
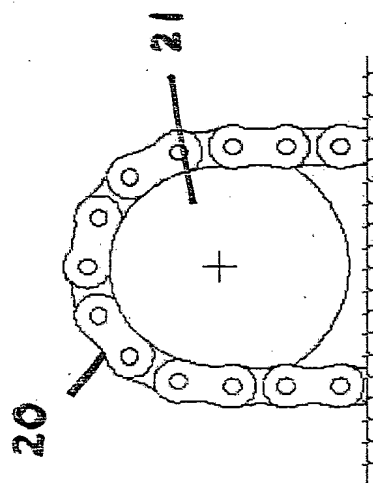


FIG. 2.

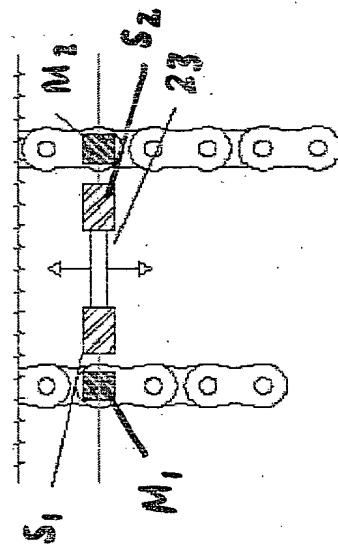
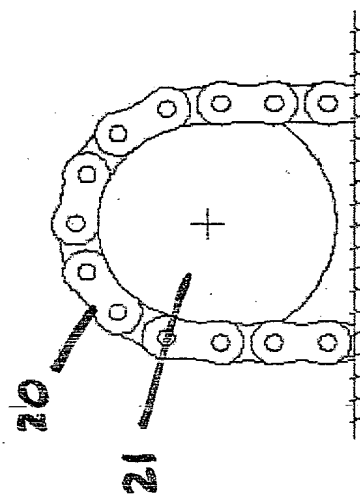


FIG. 3.

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)